DISEA ELECTRONICS

Industrial TFT LCD Module · www.odmlcd.com

DS-T101BAHA-02CD

10.1″ 1024x600 IPS TFT LCD Module

Panel type	IPS
Size (inch)	10.1
Resolution (pixels)	1024x600
Active area (mm)	222.72x125.28
Outline dims W×H×T (mm)	235.06x143.06x4.75
Brightness (cd/m²)	320
Interface	24BIT RGB
Driver IC	HX8282/HX8696
Touch screen	CTP
Touch controller	ILI2511
Bonding (CTP)	Optical Bonding
Operating temp. (°C)	-20 to 70
Storage temp. (°C)	-30 to 80

Outline drawing

Outline view (front), not to scale. Glass thickness 4.75 mm. Dashed rectangle = active area 222.72 × 125.28 mm.

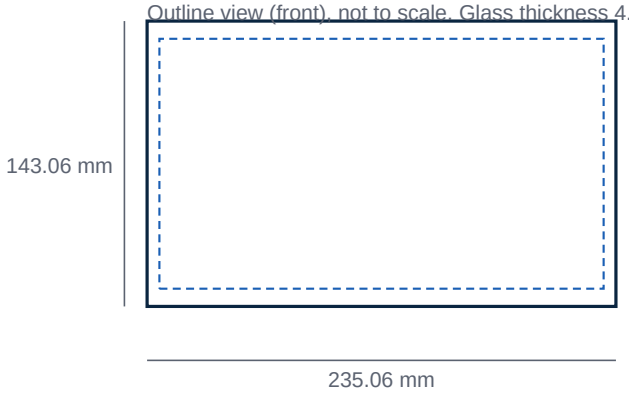

Customization

FPC pin-out, backlight, cover lens, touch, interface and shape can be customized (OEM/ODM, MOQ 500 pcs). Compatible replacements for Mitsubishi / Innolux / AUO / BOE legacy panels are available — send us your panel number for cross-reference.

Disea Electronics Co., LTD · HQ Shenzhen · Factory Zhaoqing, Guangdong, China · 23,700 m² · ISO 9001:2015 (TÜV) · Contact: louis@diseaelec.com

Preliminary datasheet generated from standard model specifications (2026-09). Values are typical, not for tooling; request the formal approval drawing before mechanical design.